


endo CUBE

Rechargeable Cord Type Endo Rotary

- Auto Reverse function
- 9 programmable memories
- Foot on/off switch
- Up to 5-hour battery life
- Compact designed controller provides various functions
- Consistent torque supply
- Works with battery or adapter
- Suitable for use with the most major brands of Ni-Ti files



Option

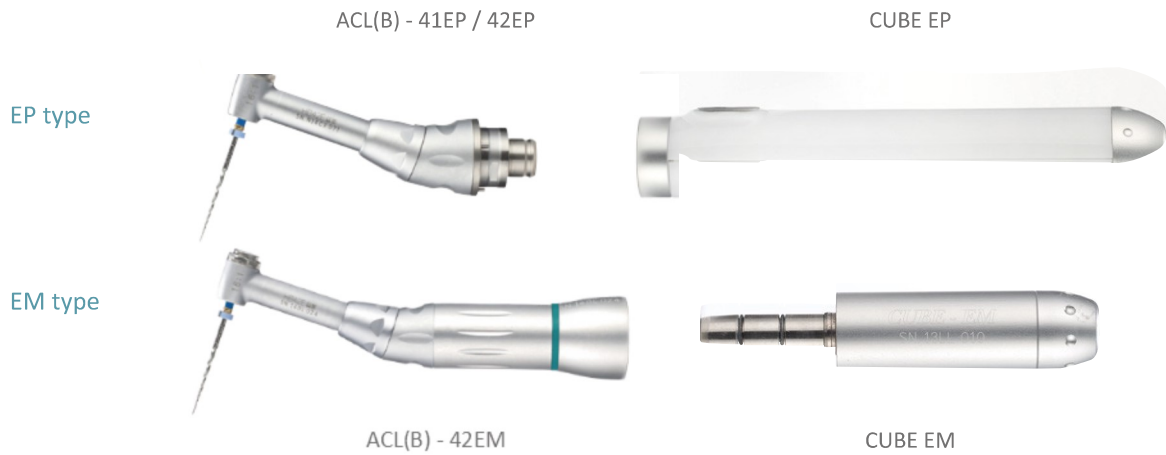

Specification

Control Box

Input	DC 20 V, 1.5A
Output	DC 6 V
Charging Time	approx. 5 hours
Dimensions (mm)	W 110 X D 196 X H 139
Weight	582g

Contra Angle Handpiece

	Standard		
	ACL(B) - 41EP	ACL(B) - 42EP	ACL(B) - 42EM
Type	EP Type	EP Type	EM Type
Gear Ratio	20 : 1	16 : 1	16 : 1
Max. Torque	5.2 N·cm	5.2 N·cm	5.2 N·cm
Max. RPM	650	800	800
Min. RPM	100	120	120
Dimensions (mm)	∅ 16.7 X L63	∅ 16.7 X L63	∅ 19.6 X L95.2
Weight	35g	35g	52g

Micro Motor

	CUBE EP	CUBE EM
Type	EP Type	EM Type
Input	DC6V	DC6V
Dimensions (mm)	∅19.8 x L108	∅19.8 x L61.7
Weight	106g	116g

